
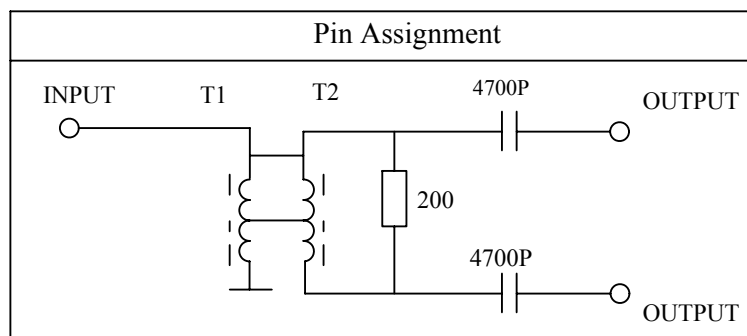


RoHS


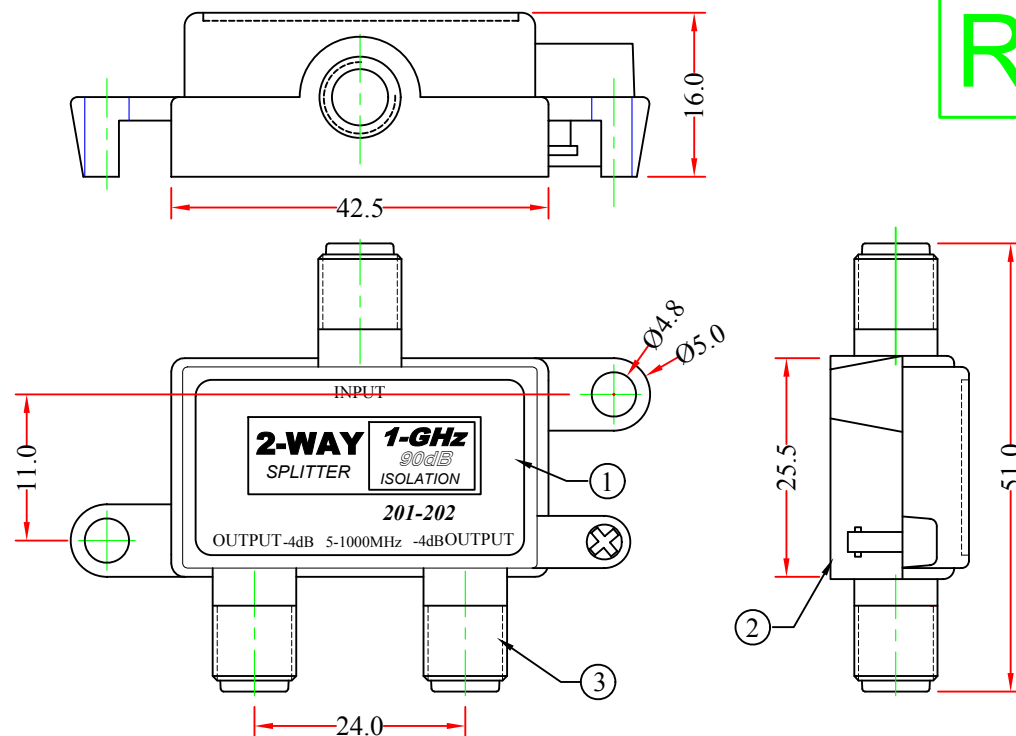


REV.	DESCRIPTION	DATE
A		05-2013

Specifications	
Parameter	Property
Port Torque	35 lbs
Lug Torque	35 lbs
Coupling Capacitor	6KV Surge Protection
Tolerances	±0.1mm
Net Weigth	1.45 oz/Unit

Electrical Specifications		
Parameter	5-42MHZ	42-1000MHZ
Insertion Loss	3.6dB max	4.3dB max
Isolation	20dB min	20dB min
Input Return Loss	15dB min	15dB min
Output Return Loss	15dB min	15dB min
EMI Shielding	90dB min	90dB min

4	Mounting Screws,Steel / Nickel Plated
3	F-Connector,ZnCr2 Plated, $\frac{3}{8}$ -32UNEF-2A
2	Back Plate,Steel / Tin Plated
1	Case,Zinc-Alloy / ZnCr2 Plated
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	201-202			DRAWER	JL
TITLE	F-pin Coaxial Splitter, 2 way, 1 GHz 90 dB			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:				